ACCESSORIES






TECHNOSILOS S.r.l. Via Piana 67, 47032 Bertinoro (FC), ITALY www.technosilos.com





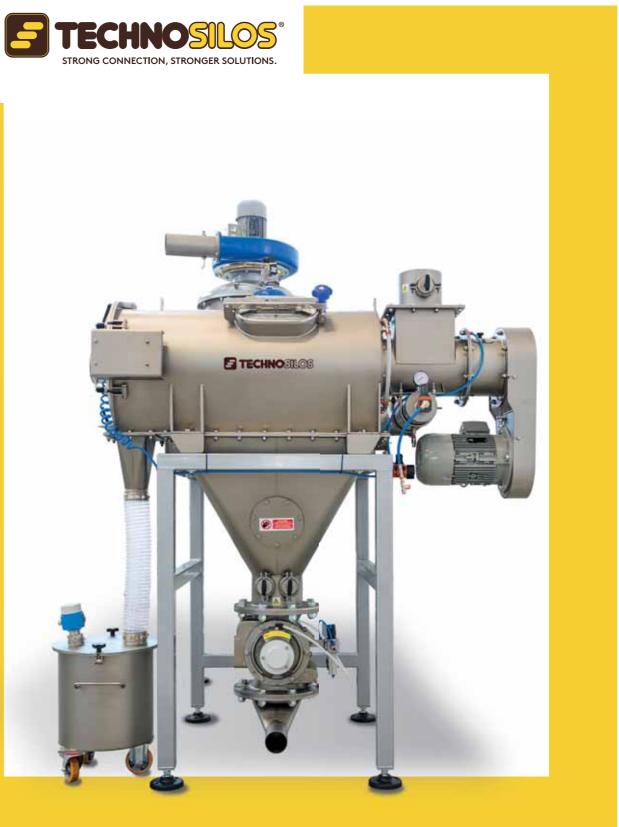



CENTRIFUGAL SIFTER

Safety or sorting sieving for powdery or granular products





Application

Control sieving, selection, removal of foreign bodies, breakdown of lumps, aeration of solid bulk products.

Operating principle

The product, fed by a metering or pneumatic conveying element, is introduced into the tumbler through an auger which regulates the flow towards the sieving chamber. A rotating shaft creates a centrifugal force that spreads the product around the walls of the cylindric sieve.

The sieved product passes through the mesh and drops into the discharge hopper. Wastage and foreign bodies are trapped by the mesh and transferred to the waste outlet.

Benefits:

Inline by pressure or vacuum, or static operation.

High production capacity with very fine nets (down to 200 microns).

Optional quick opening and removal of sieve without tools for sieving of different materials

Lump breaking action.

Removal of foreign bodies with no interruption of production.


Easy maintenance.

Simple installation and reduced dimensions.

CENTRIFUGAL SIFTER

1Engine and transmission2Product entry3Compressed air tank4Shaft and paddles5Output of screened material6Output of waste material



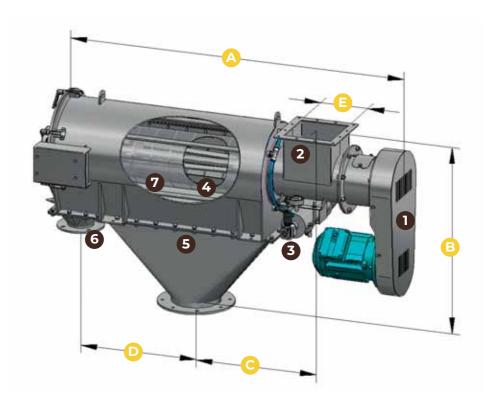

Dimensions

	SC180	SC250	SC400
	mm	mm	mm
Α	1203	1670	2672
В	474	658	1053
С	406	563	901
D	382	530	848
E	159	220	352

Performance

