


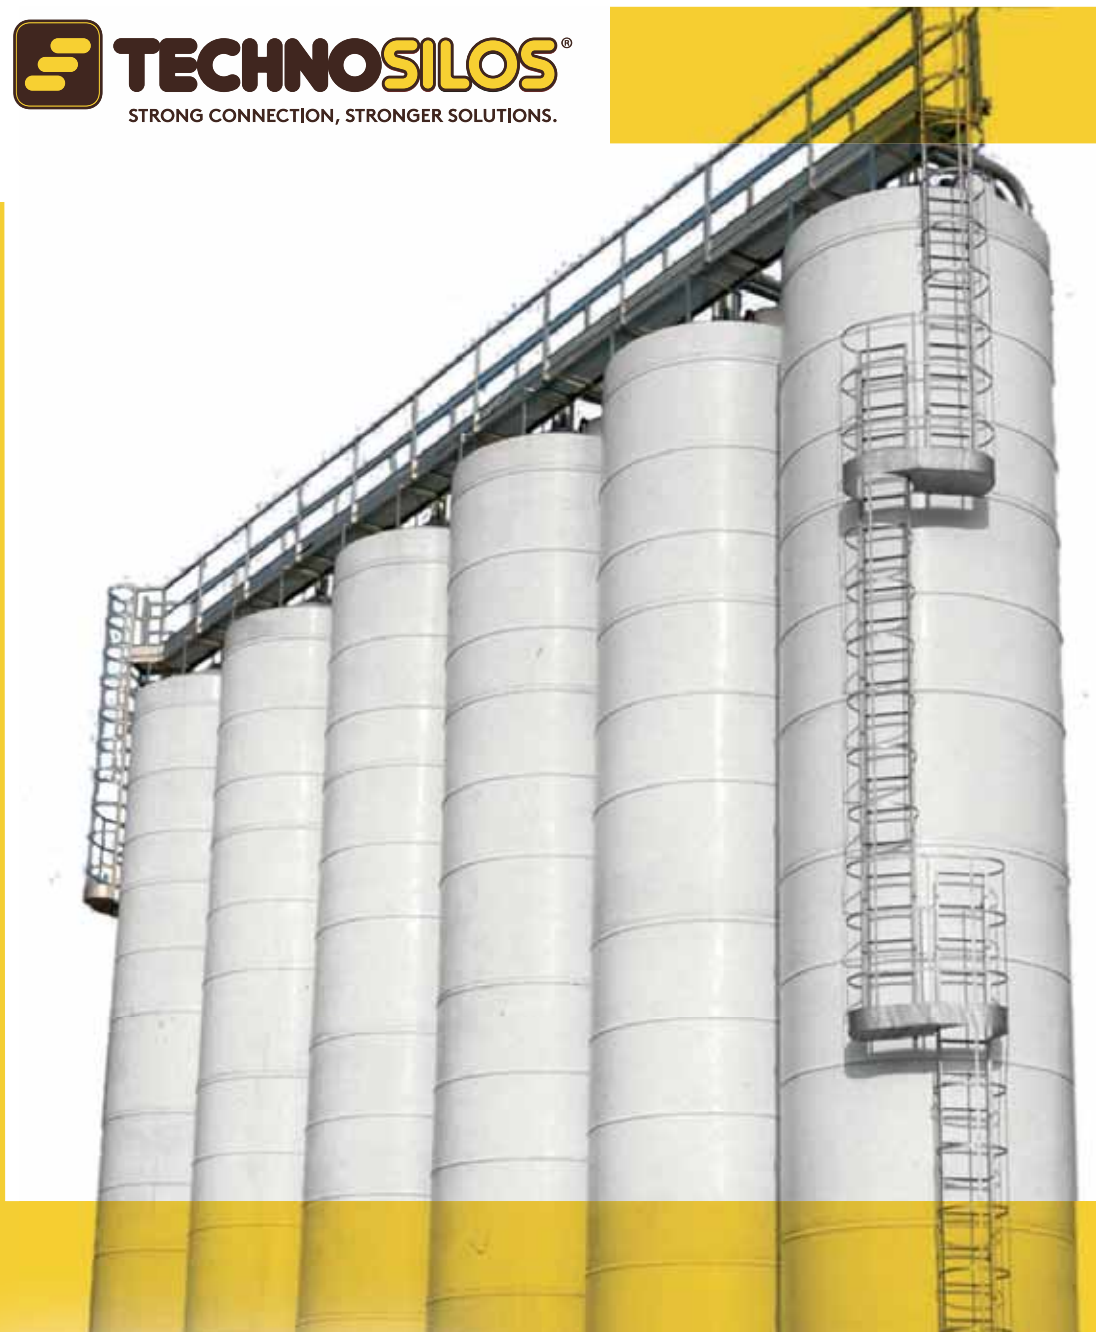

FIBERGLASS SILOS

External storage of solid
powders and granules

Benefits:

Storage of products with bulk density
up to 1.2 kg/dm³

Long life thanks to a shell in reinforced fiberglass

Completely waterproof and weatherproof

Elimination of internal condensation in the
version with insulated double wall, and option
of fitting a dehumidification system in extreme
environmental conditions

Completely non-toxic, hygienic, with high degree
of preservation of raw material, in compliance with
food hygiene standards

Internal anti-static treatment according to
Guideline CEI

Compliant with Atex Directive



TECHNICAL DATA

1 Filter

2 Access ladder


3 Silos

4 Weighing system

5 Loading pipe

A	B	Cone 60°/90°		Flat bottom	
		Capacity [m³]	Capacity* [t]	Capacity [m³]	Capacity* [t]
2000	3900	6,6	4	7,8	4,5
2000	4900	10	6	11,2	6,5
2000	6000	13,3	8	14,5	8,5
2000	7000	16,4	9,5	17,6	10,5
2000	7500	18,2	11	19,4	11,5
2000	9000	22,7	13,5	23,9	14
2000	10000	25	15	26,2	15,5
2400	4650	12	7	14,2	8,5
2400	5100	13	8	16,2	9,5
2400	5900	18	10,5	20,2	12
2400	7500	25	15	27,2	16
2400	9050	32	19	34,2	20,5
2400	10700	39	23	41,2	24,5
2400	12300	46	27,5	48,2	29
2400	13100	50	30	52,2	31
3000	9000	45	27	52	31
3000	9800	50,7	30	57,7	34,5
3000	11200	60	36	67	40
3000	12500	70	42	77	46
3000	13300	75	45	82	49
3000	13700	78	46,5	85	51
3000	14600	83,5	50	90,5	54
3000	16800	100	60	107	64

* Bulk density 0,6 kg/dm³

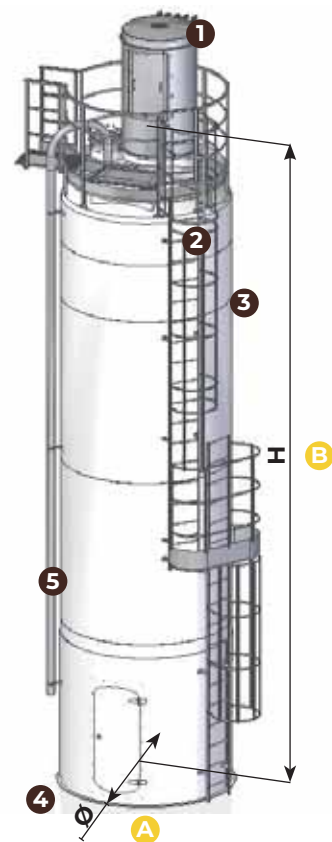


Accessories



Loading air filtering and ATEX protections



Silo weighing systems and loading safety system

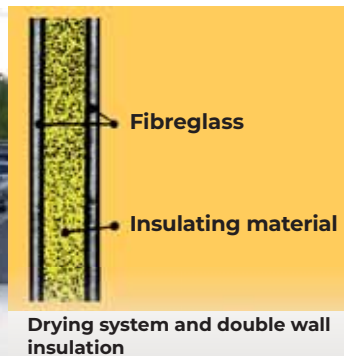

Drying system and double wall insulation



Single or Multiple FIFO extraction



TECHNOSILOS S.r.l.
Via Piana 67, 47032 Bertinoro (FC), ITALY
www.technosilos.com

