



VIBRATING SIEVE

Sieving, control and selection of powders by vibration

Operating principle:

The product, introduced statically or with pneumatic transport, is screened by a vibrating net configurable according to the processing needs. The waste is conveyed to a container or taken from the grid periodically. The screened product continues its path in the transfer circuit in production.

Benefits:

- Single or Multistage
- Can be installed along pneumatic lines
- Interchangeable screening nets
- Modularity of screening stages
- Simple operation and low power consumption
- Quick and easy maintenance
- Low noise level




TECHNICAL DATA

- 1 Product entry
- 2 Butterfly valve
- 3 Waste discharge
- 4 Sifted product discharge

Performances

Capacity [kg/h]*	Mesh [mm]	Machine model [Ø]
1000 - 2000	1,5	VB1 600 mm
3000 - 6000	1,5	VB1 800 mm

* Wheat flour

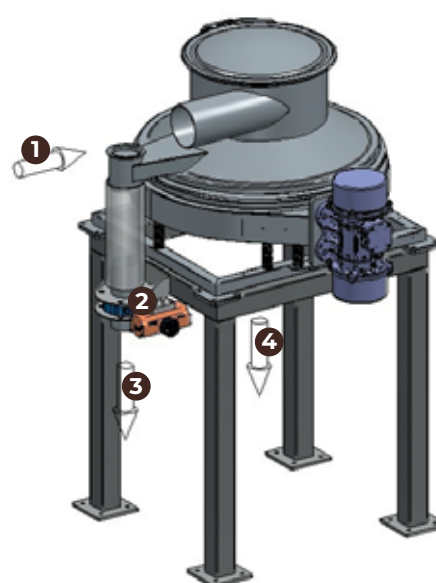

Accessories



TECHNOSILOS S.r.l.
Via Piana 67, 47032 Bertinoro (FC), ITALY
www.technosilos.com

