

ALUMINUM SILOS

External storage of solid powders and granules

Benefits:

Storage of products with bulk density up to 1.2 kg/dm $^{\rm 3}$

Long life thanks to construction material

Completely waterproof and weatherproof

Elimination of internal condensation in the version with insulated double wall and option of fitting a dehumidification system in extreme environmental conditions

Completely hygienic with high degree of preservation of raw materials, in compliance with food hygiene standards

Compliant with Atex Directive

Construction according to DIN and Eurocode standards

Construction material fully recyclable after decommissioning


ENG



TECHNICAL DATA

1	Filter
2	Access ladder
3	Silos
4	Weighing system
5	Loading pipe


	Size			
	[Unit of measurement]	Min.	Max.	
Α	Ø [mm]	1500	5500	
в	H [mm]	3500	26000	
	Capacity [m ³]	5	500	
	Loading flowrate [kg/h]	1000	30000	

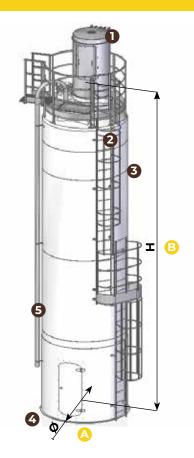


Accessories



Loading air filtering and ATEX protections





Single or Multiple FIFO extraction















